



PremierPro™
by MEDSOURCE


SAFETY IV CATHETER CATALOG

2024

SLIDE SAFETY ACTIVATION PERIPHERAL IV CATHETERS

Product Feature: ClearSafe Comfort®

Available in 14G to 24G

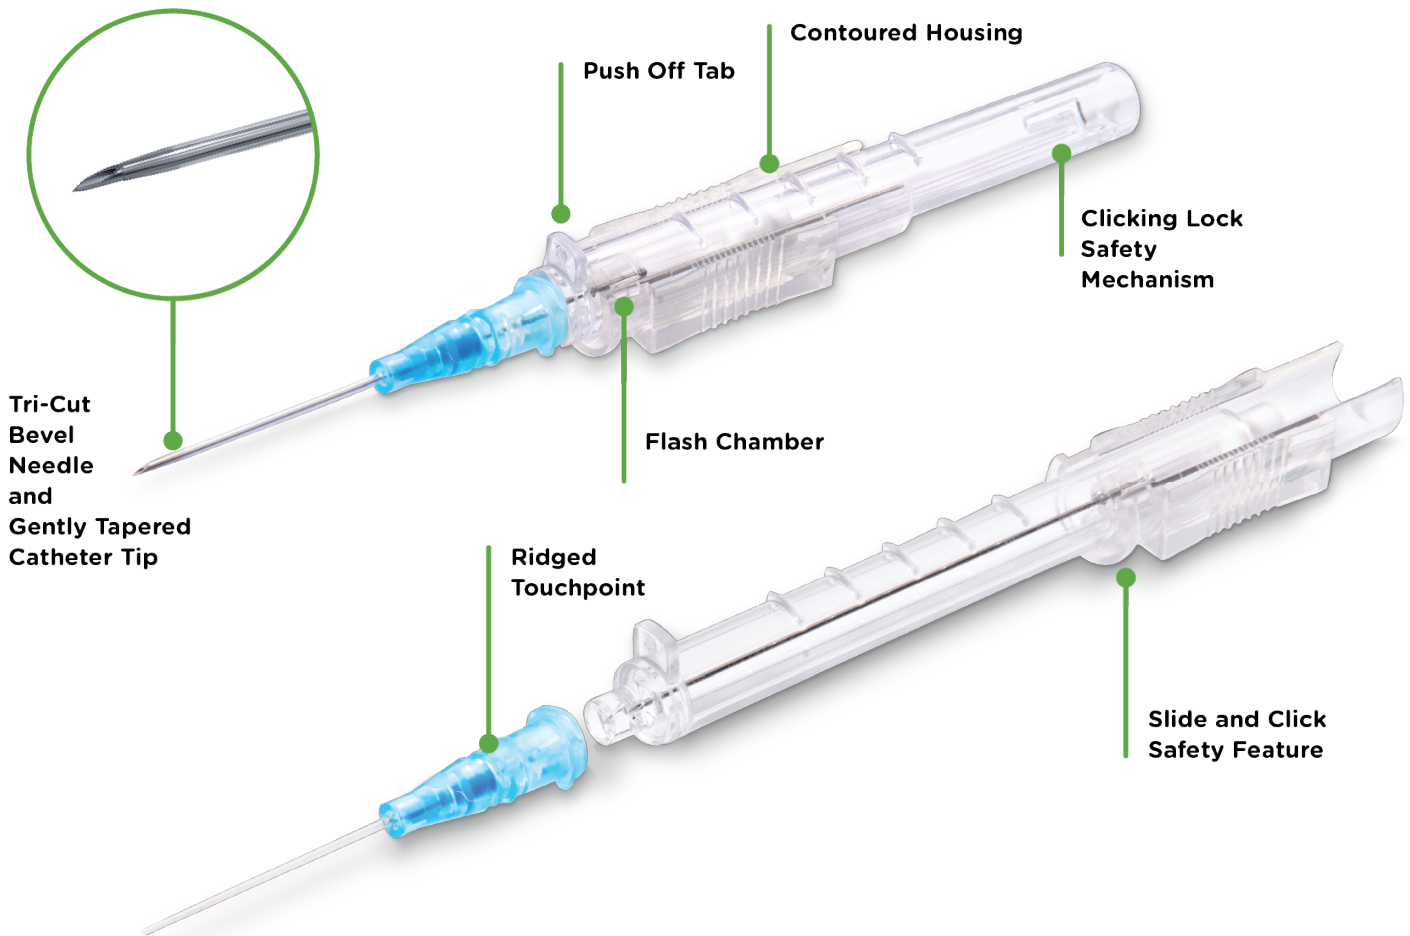

ClearSafe Comfort®
Application Video

ClearSafe Comfort® Safety IV Catheter

FEATURES

- Fully encapsulating needle shield and slide style needle retraction safety mechanism
- Ergonomically designed thumb grip
- Gently tapered catheter tip
- Flashback chamber
- Straight hub color coded

Benefits

- Designed to help healthcare workers with compliance to Needlestick Safety and Prevention Act (NSPA) of 2000
- Allows for a variety of user techniques to aid insertion
- Provides smooth transition from needle to catheter
- Allows clear visual confirmation of successful venipuncture through flashback and easy handling
- Helps to select the correct gauge for patients

Specification

- Manufactured with PUR (Polyurethane)
- Siliconized ground stainless steel needle
- Smooth surface for easy catheter insertion and advancement
- Softer, more comfortable for the patient and longer in-dwelling performance
- Sharp needle technology provides both ease of penetration and improved patient comfort during cannulation



ClearSafe Comfort® Blood Control Safety IV Catheter

All the features and benefits of ClearSafe Comfort® Safety IV Catheter with blood control valve.



PUR CATHETER MATERIAL

MedSource proprietary PUR material maintains tensile strength during cannulation and softens while inside the patient's vein. This PUR material aids in a longer indwell performance compared to PTFE and is generally considered to be more comfortable for the patient.










TAPERED CATHETER TIP

- Sharp triple-faceted needle tip
- Smooth, tapered catheter tip
- PUR material softens inside patient's vein and provides longer dwell time

CLEARSAFE COMFORT®








ORDER INFORMATION

ClearSafe Comfort® Safety IV Catheter

Item No.	Gauge	Length	Gravity Flow (mL/min)*	Power Injection (PSI)*	Hub Color	Packaging
31C14125	14G	1.25in	297 mL/min	Up to 250 PSI	Orange 	50/BX, 4 BX/CS
31C16125	16G	1.25in	220 mL/min	Up to 250 PSI	Grey 	50/BX, 4 BX/CS
31C18125	18G	1.25in	94 mL/min	Up to 300 PSI	Green 	50/BX, 4 BX/CS
31C20125	20G	1.25in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31C20100	20G	1in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31C22100	22G	1in	36 mL/min	Up to 300 PSI	Blue 	50/BX, 4 BX/CS
31C24075	24G	0.75in	20 mL/min	Up to 300 PSI	Yellow 	50/BX, 4 BX/CS

*Data on file

ClearSafe Comfort® Blood Control Safety IV Catheter

Item No.	Gauge	Length	Gravity Flow (mL/min)*	Power Injection (PSI)*	Hub Color	Packaging
31CB14125	14G	1.25in	360 mL/min	Up to 250 PSI	Orange 	50/BX, 4 BX/CS
31CB16125	16G	1.25in	220 mL/min	Up to 250 PSI	Grey 	50/BX, 4 BX/CS
31CB18125	18G	1.25in	94 mL/min	Up to 300 PSI	Green 	50/BX, 4 BX/CS
31CB20125	20G	1.25in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31CB20100	20G	1in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31CB22100	22G	1in	36 mL/min	Up to 300 PSI	Blue 	50/BX, 4 BX/CS
31CB24075	24G	0.75in	20 mL/min	Up to 300 PSI	Yellow 	50/BX, 4 BX/CS

*Data on file



ClearSafe Comfort®
Instructions For Use (IFU)




ClearSafe Comfort® Blood Control
Instructions For Use (IFU)

PUSH BUTTON SAFETY ACTIVATION PERIPHERAL IV CATHETERS

Product Feature: TrueSafe Comfort[®]

Available in 14G to 24G

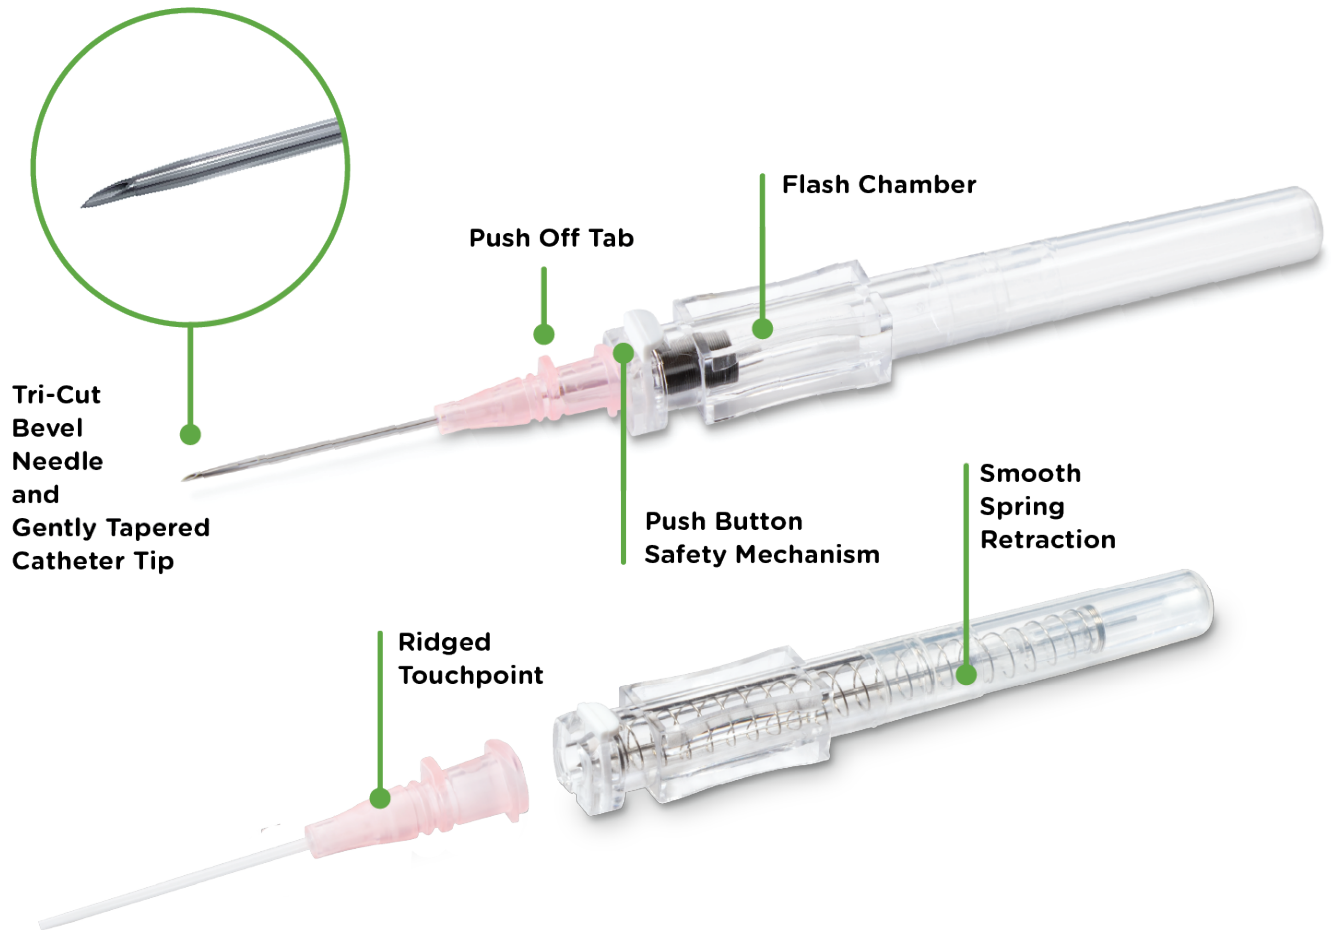

TrueSafe Comfort[®]
Application Video

TrueSafe Comfort® Safety IV Catheter

Features


- Fully encapsulating needle shield and push button style needle retraction safety mechanism
- Ergonomically designed thumb grip
- Gently tapered catheter tip
- Flashback chamber
- Straight hub color coded

Benefits

- Designed to help healthcare workers with compliance to Needlestick Safety and Prevention Act (NSPA) of 2000
- Allows for a variety of user techniques to aid insertion
- Provides smooth transition from needle to catheter
- Allows clear visual confirmation of successful venipuncture through flashback and easy handling
- Helps to select the correct gauge for patients

Specification

- Manufactured with proprietary VenaPUR® (Polyurethane)
- Siliconized ground stainless steel needle
- RapidFlash® notched needle
- Smooth surface for easy catheter insertion and advancement
- Maximum comfort for the patient
- Sharp needle technology provides both ease of penetration and improved patient comfort during cannulation



Allows for quick, clear visual confirmation of successful venipuncture
Featured in TrueSafe Comfort® only- sizes 20G - 24G

TrueSafe Comfort® Blood Control Safety IV Catheter

All the features and benefits of ClearSafe Comfort® Safety IV Catheter with blood control valve. Does not contain RapidFlash® notched needle.



VENAPUR® CATHETER MATERIAL










MedSource proprietary PUR material designed to remain kink-free and soften within the body.



TRUESAFE COMFORT®









ORDER INFORMATION

TrueSafe Comfort® Safety IV Catheter

Item No.	Gauge	Length	Gravity Flow (mL/min)*	Power Injection (PSI)*	Hub Color	Packaging
31T14175	14G	1.75in	297 mL/min	Up to 250 PSI	Orange 	50/BX, 4 BX/CS
31T16177	16G	1.77in	220 mL/min	Up to 250 PSI	Grey 	50/BX, 4 BX/CS
31T18116	18G	1.16in	94 mL/min	Up to 300 PSI	Green 	50/BX, 4 BX/CS
31T18188	18G	1.88in	94 mL/min	Up to 300 PSI	Green 	50/BX, 4 BX/CS
31T20100	20G	1in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31T20116	20G	1.16in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31T20188	20G	1.88in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31T22100	22G	1in	36 mL/min	Up to 300 PSI	Blue 	50/BX, 4 BX/CS
31T24075	24G	0.75in	20 mL/min	Up to 300 PSI	Yellow 	50/BX, 4 BX/CS

*Data on file

TrueSafe Comfort® Blood Control Safety IV Catheter

Item No.	Gauge	Length	Gravity Flow (mL/min)*	Power Injection (PSI)*	Hub Color	Packaging
31TB16177	16G	1.77in	220 mL/min	Up to 250 PSI	Grey 	50/BX, 4 BX/CS
31TB18116	18G	1.16in	94 mL/min	Up to 300 PSI	Green 	50/BX, 4 BX/CS
31TB18188	18G	1.88in	94 mL/min	Up to 300 PSI	Green 	50/BX, 4 BX/CS
31TB20100	20G	1in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31TB20116	20G	1.16in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31TB20188	20G	1.88in	61 mL/min	Up to 300 PSI	Pink 	50/BX, 4 BX/CS
31TB22100	22G	1in	36 mL/min	Up to 300 PSI	Blue 	50/BX, 4 BX/CS
31TB24075	24G	0.75in	20 mL/in	Up to 300 PSI	Yellow 	50/BX, 4 BX/CS

*Data on file




TrueSafe Comfort®
Instructions For Use (IFU)



TrueSafe Comfort® Blood Control
Instructions For Use (IFU)

PUSH BUTTON SAFETY ACTIVATION PERIPHERAL IV CATHETERS (NEONATAL)

Product Feature: NanoCath TrueSafe Comfort[®]
Available in 24G to 26G

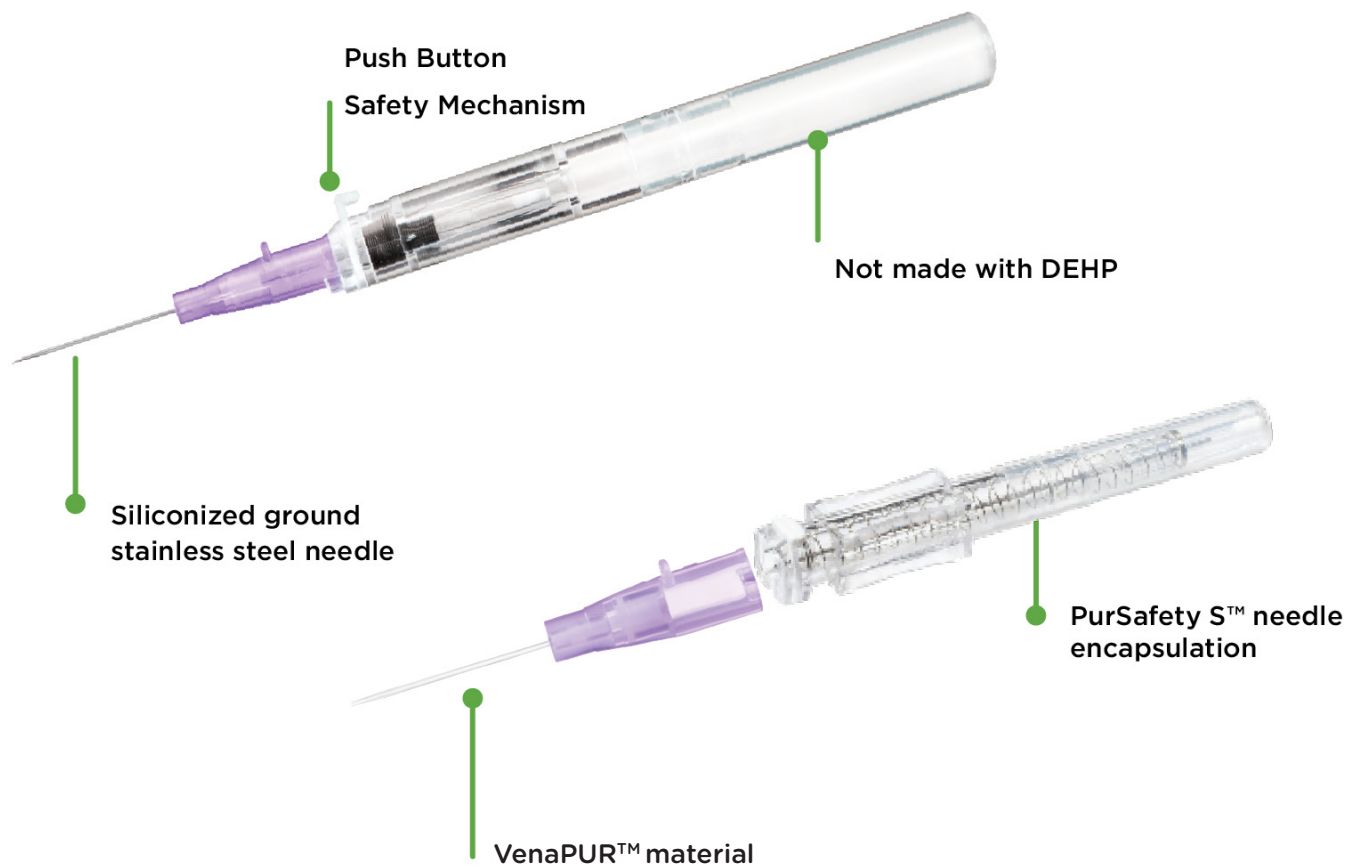

TrueSafe Comfort[®]
Application Video

NanoCath TrueSafe Comfort® Safety IV Catheter

Features

- PUR Safety S™ encapsulation and push button style needle retraction safety mechanism
- Gently tapered catheter tip
- Flashback chamber
- Straight hub color coded

Benefits




- Designed to help healthcare workers with compliance to Needlestick Safety and Prevention Act (NSPA) of 2000
- Provides smooth transition from needle to catheter
- Allows clear visual confirmation of successful venipuncture through flashback and easy handling
- Helps to select the correct gauge for neonatal patients



Specification

- Manufactured with proprietary VenaPUR® (Polyurethane)
- Siliconized ground stainless steel needle
- Smooth surface for easy catheter insertion and advancement
- Maximum comfort for the neonatal patients
- Sharp needle technology provides both ease of penetration and improved neonatal patient comfort during cannulation

TRUESAFE COMFORT® NANOCATH ORDER INFORMATION

Item No.	Gauge	Length	Gravity Flow (mL/min)*	Hub Color	Packaging
31TN24056	24G	0.56in	20mL/min	Yellow 	50/BX, 4 BX/CS
31TN26056	26G	0.56in	11mL/min	Purple 	50/BX, 4 BX/CS
31TN26075	26G	0.75in	11mL/min	Purple 	50/BX, 4 BX/CS

*Data on file



TrueSafe Comfort®
Application Video